
MYSTIC HD ELECTRICAL REQUIRMENTS

The **MYSTIC HD** System requires the following electrical service:

1. A dedicated grounded GFI 120 VAC, Duplex, 20 AMP outlet, and a grounded 220 VAC, single phase 20 AMP (Min) outlet, located within four feet of the back of the Mystic Tan HD System.

(if you are in a 220-240v country, electrical requirement is 220-240v 50/60hz)

220 VAC, single phase 20 AMP (Min) outlet

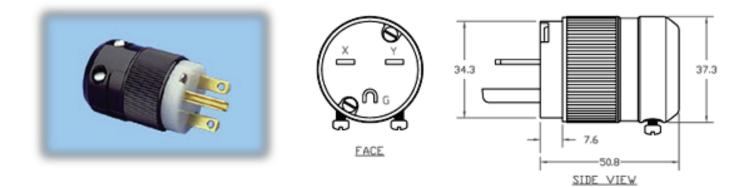

- 2. The MYSTIC HD System can be enabled using a T-Max timer 3A to link with salon management software. If you do not have a 3A timer, please order one from MT Industries, Inc. If the MYSTIC HD System is to be connected to the salon T-Max system, please ensure that all proper communication cables are present with enough length to reach the back of the machine plus an additional 5 feet.
- **3.** The MYSTIC HD System can also be controlled through its integrated Touchpad.
- 4. All electrical work must be completed according to local building codes.
- **5.** MT Industries, Inc. customer service tech is not responsible for electrical service installation.