

# R-26B Detail A - Ballast Box R-26B

Cord No. 1 Connector		
Ballast No. (Back of Tray)	Wire Color	Pin No.
1	Yellow	1 & 2
2	Yellow	3 & 4
3	Yellow	5 & 6
4	Yellow	7 & 8
5	Yellow	9 & 10
6	Yellow	11 & 12
7	Brown	13 & 14
Timer	Black-Power	23
Timer	Black-Power	24
Timer	White Neutral	25
Timer	Green-Ground	26
Timer	Blue-Fan Power	27
Timer	Red-Relay Coil	28
Top Fan	White-Neutral	34
Top Ground	Green-Ground	35
Top Fan	Blue-Power	36

Cord No. 3 Connector		
Ballast No. (Front of Tray)	Wire Color	Pin No.
1	Yellow	1 & 2
2	Yellow	3 & 4
3	Yellow	5 & 6
4	Yellow	7 & 8
5	Yellow	9 & 10
6	Yellow	11 & 12
7	Yellow	13 & 14
Jumper	Brown	15 & 16
Top Fan	White - Neutral	34
Top Ground	Green	35
Top Fan	Black - Power	36

Cord No. 2 Connector		
Ballast No. (Back of Tray)	Wire Color	Pin No.
1	Red	1 & 2
1	Blue	3 & 4
2	Red	5 & 6
2	Blue	7 & 8
3	Red	9 & 10
3	Blue	11 & 12
4	Red	13 & 14
4	Blue	15 & 16
5	Red	17 & 18
5	Blue	19 & 20
6	Red	21 & 22
6	Blue	23 & 24
7	Blue	25 & 26

Cord No. 4 Connector		
Ballast No. (Front of Tray)	Wire Color	Pin No.
1	Red	1 & 2
1	Blue	3 & 4
2	Red	5 & 6
2	Blue	7 & 8
3	Red	9 & 10
3	Blue	11 & 12
4	Red	13 & 14
4	Blue	15 & 16
5	Red	17 & 18
5	Blue	19 & 20
6	Red	21 & 22
6	Blue	23 & 24
7	Red	25 & 26

NOTE: The No. 7 Ballast is split between the top and bottom units.

# R-26B Detail B - Top & Bottom Unit R-26B

Cord No. 1 & 3 Connector		
Pair No.	Wire Color	Pin No.
1	Brown	1
1	Brown	2
2	Brown	3
2	Brown	4
3	Brown	5
3	Brown	6
4	Brown	7
4	Brown	8
5	Brown	9
5	Brown	10
6	Brown	11
6	Brown	12
7	Brown	13 & 14
7	Brown	15 & 16
*Timer	Black-Power	23
*Timer	Black-Power	24
*Timer	White Neutral	25
*Timer	Green-Ground	26
*Timer	Blue-Fan Power	27
*Timer	Red-Relay Coil	28
Fan	White-Neutral	34
Ground	Green-Ground	35
Fan	Blue-Power	36


Cord No. 2 & 4 Connector		
Pair No.	Wire Color	Pin No.
1	Brown	1
1	Brown	2
1	Brown	3
1	Brown	4
2	Brown	5
2	Brown	6
2	Brown	7
2	Brown	8
3	Brown	9
3	Brown	10
3	Brown	11
3	Brown	12
4	Brown	13
4	Brown	14
4	Brown	15
4	Brown	16
5	Brown	17
5	Brown	18
5	Brown	19
5	Brown	20
6	Brown	21
6	Brown	22
6	Brown	23
6	Brown	24
6	Brown	25
7*	Brown	26
7*	Brown	25
7*	Brown	26

NOTE: Cord No. 3 does not contain timer wires.

R-32B

Wiring Diagram


R-32B

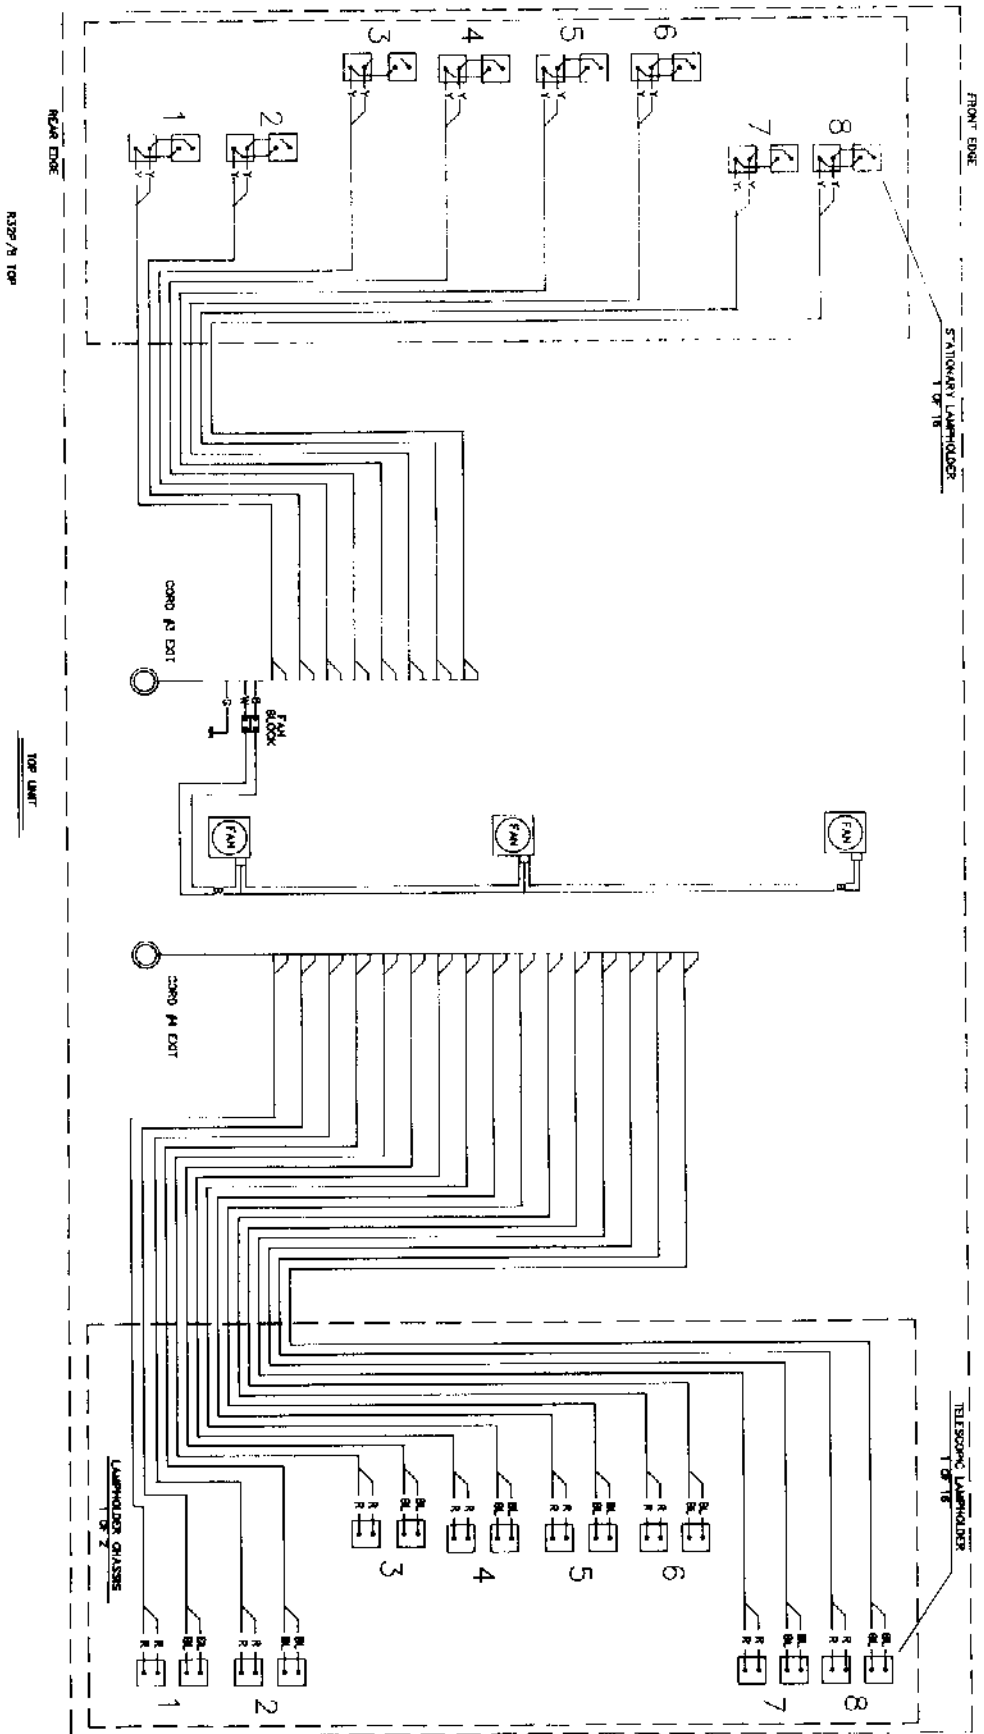


# R-32B

# Wiring Diagram

# R-32B

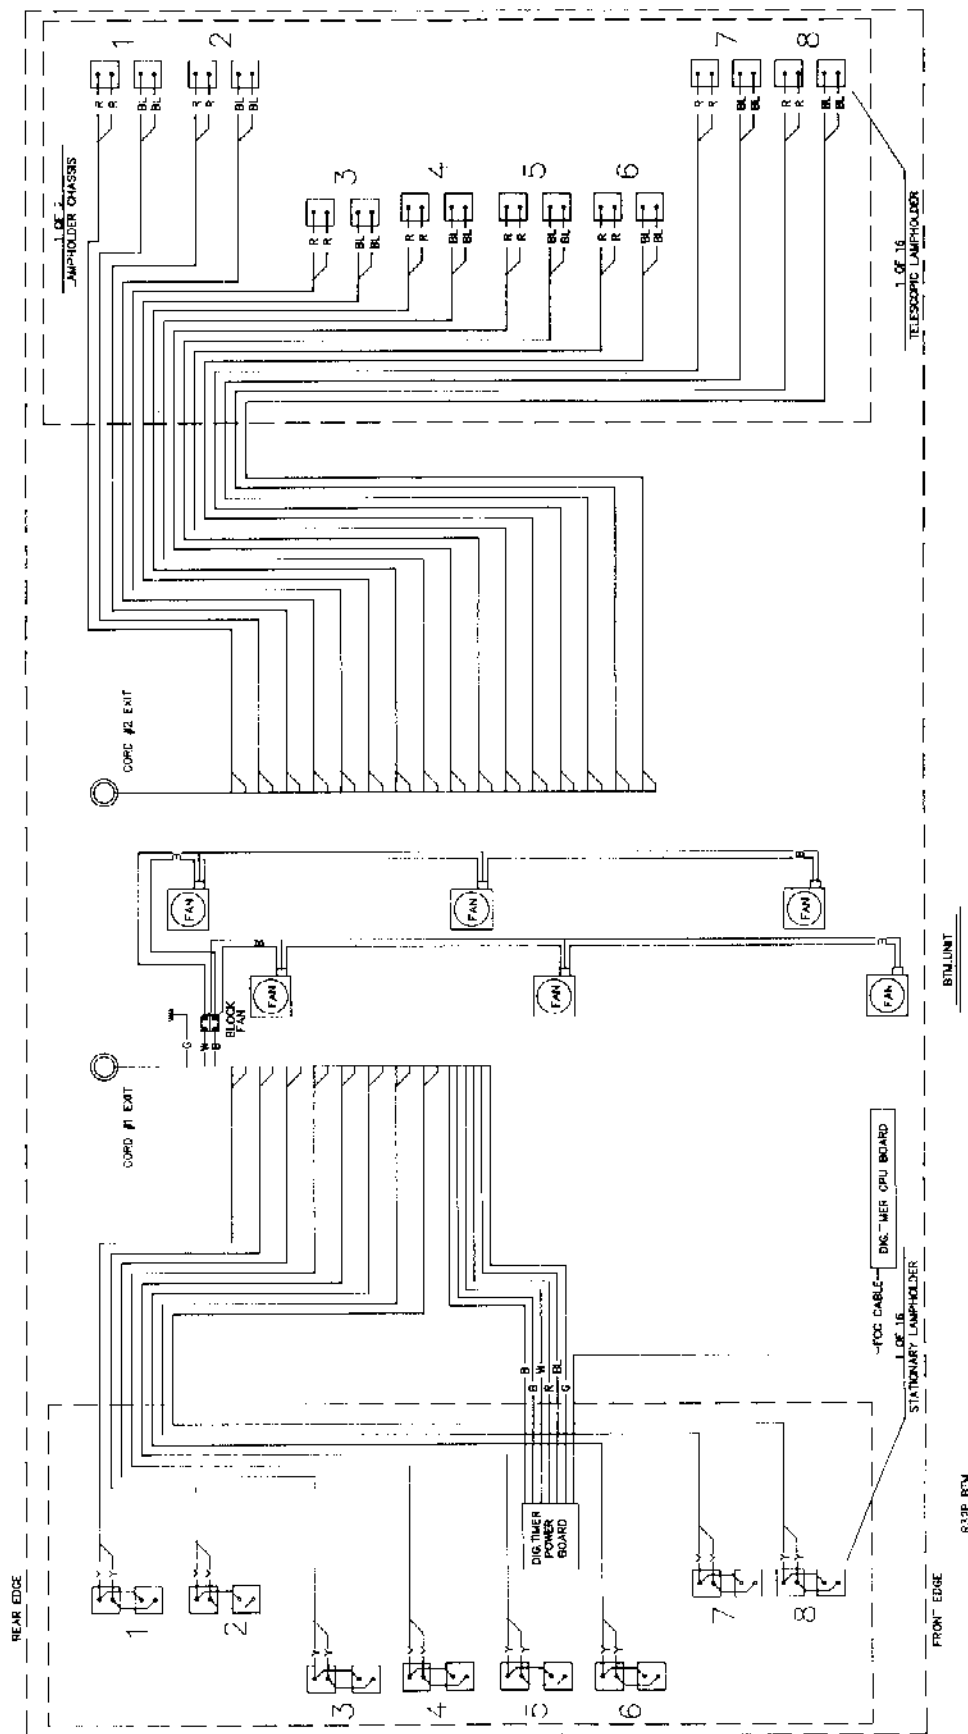

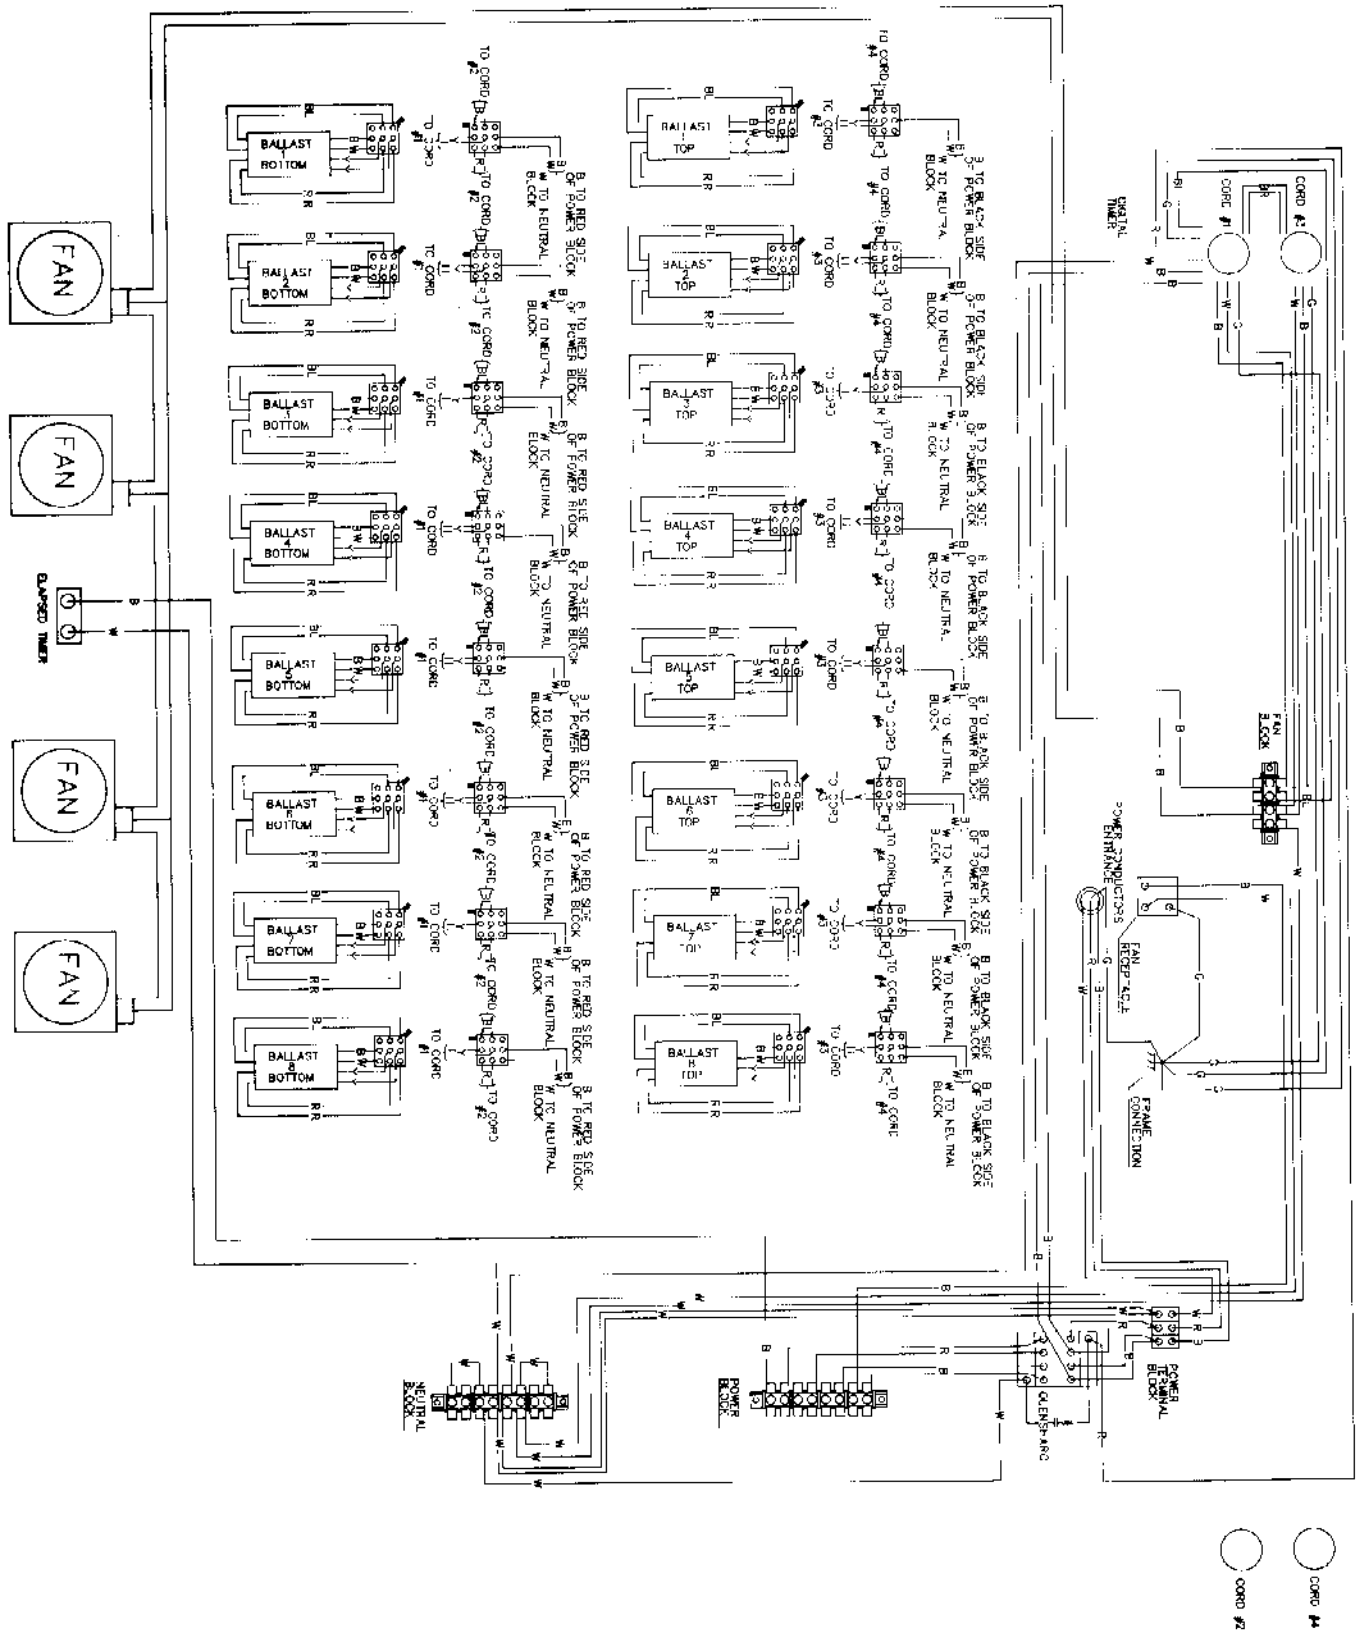

# R-32B Detail A - Ballast Box R-32B

## Cord No. 1 Connector

Ballast No. (Back of Tray)	Wire Color	Pin No.
1	Yellow	1,2
2	Yellow	3,4
3	Yellow	5,6
4	Yellow	7,8
5	Yellow	9,10
6	Yellow	11,12
7	Yellow	13,14
8	Yellow	15,16
Timer	Black-Power	23
Timer	Black-Power	24
Timer	White-Neutral	25
Timer	Green-Ground	26
Timer	Blue-Fan Power	27
Timer	Red-Relay Coil	28
Top Unit Fan	White	34
Top Unit Ground	Green	35
Top Unit Fan	Black	36

## Cord No. 3 Connector

Ballast No. (Front of Tray)	Wire Color	Pin No.
1	Yellow	1,2
2	Yellow	3,4
3	Yellow	5,6
4	Yellow	7,8
5	Yellow	9,10
6	Yellow	11,12
7	Yellow	13,14
8	Yellow	15,16
Bottom Unit Fan	White	34
Bottom Unit Ground	Green	35
Bottom Unit Fan	Black	36

## Cord No. 2 Connector

Ballast No. (Back of Tray)	Wire Color	Pin No.
1	Red	1,2
1	Blue	3,4
2	Red	5,6
2	Blue	7,8
3	Red	9,10
3	Blue	11,12
4	Red	13,14
4	Blue	15,16
5	Red	17,18
5	Blue	19,20
6	Red	21,22
6	Blue	23,24
7	Red	25,26
7	Blue	27,28
8	Red	29,30
8	Blue	31,32

## Cord No. 4 Connector

Ballast No. (Front of Tray)	Wire Color	Pin No.
1	Red	1,2
1	Blue	3,4
2	Red	5,6
2	Blue	7,8
3	Red	9,10
3	Blue	11,12
4	Red	13,14
4	Blue	15,16
5	Red	17,18
5	Blue	19,20
6	Red	21,22
6	Blue	23,24
7	Red	25,26
7	Blue	27,28
8	Red	29,30
8	Blue	31,32

# R-32B Detail B - Top & Bottom Unit R-32B

## Cord No. 1 & 3 Connector

Pair No.	Wire Color	Pin No.
1	Brown	1
1	Brown	2
2	Brown	3
2	Brown	4
3	Brown	5
3	Brown	6
4	Brown	7
4	Brown	8
5	Brown	9
5	Brown	10
6	Brown	11
6	Brown	12
7	Brown	13
7	Brown	14
8	Brown	15
8	Brown	16
*Timer	Black-Power	23
*Timer	Black-Power	24
*Timer	White-Neutral	25
*Timer	Green-Ground	26
*Timer	Blue-Fan Power	27
*Timer	Red-Relay Coil	28
Fan	White	34
Ground	Green	35
Fan	Blue	36

## Cord No. 2 & 4 Connector

Pair No.	Wire Color	Pin No.
1	Brown	1
1	Brown	2
1	Brown	3
1	Brown	4
2	Brown	5
2	Brown	6
2	Brown	7
2	Brown	8
3	Brown	9
3	Brown	10
3	Brown	11
3	Brown	12
4	Brown	13
4	Brown	14
4	Brown	15
4	Brown	16
5	Brown	17
5	Brown	18
5	Brown	19
5	Brown	20
6	Brown	21
6	Brown	22
6	Brown	23
6	Brown	24
7	Brown	25
7	Brown	26
7	Brown	27
7	Brown	28
8	Brown	29
8	Brown	30
8	Brown	31
8	Brown	32

NOTE: Cord No. 3 does not contain timer wires.